

Tip Clearance Effects on the Performance of Ducted Fan

Iliyas Raza, Jinsoo Cho

Abstract— An advanced generation of UAVs (Unmanned Aerial Vehicles) with ducted fan is being fabricated for a wide range of missions comprising investigation, inspection, and combat missions. In addition, there are developments to cover several roles such as meteorological studies, traffic control and hazard mitigation etc. This paper presents widespread results experimentally acquired for investigating the aerodynamic characteristics as effect of tip clearance on small UAVs with ducted fan. Three samples of ducted fans with varying tip clearance but same rotor size was studied with three diverse yawed conditions. 3D velocity flow fields were measured from root to tip for a ducted fan's inlet and outlet. The data was acquired with calibrated slanted hot-wire anemometer by Phase-Locked Ensemble Averaging Technique (PLEAT). Non-linear differential equations are simultaneously resolved with Newton–Raphson method. The flow field characteristics through axial, tangential and radial velocity contours were analyzed for tip vortex and secondary flow. The effects of tip clearance were investigated through wind tunnel on axial thrust. To achieve an enhanced ducted fan performance, tip clearance needs to be optimized.

Index Terms—Ducted fan, inclined hot-wire, thrust, velocity flow field and tip clearance

I. INTRODUCTION

Current research development in engineering systems has spurred interest in finding new solutions for defence and other missions. One of the solutions assistive in such conditions is use of UAVs [1]. There are wide range applications of UAV that comprise investigation, inspection and many combatant and non-combatant missions such as traffic monitoring, meteorological studies, hazard mitigation etc. The merits of these vehicles are not limited to size and weight but low operational cost etc. Present research surveys have exposed that marvelous research in hand in the area of UAV design and development pertaining to above mentioned missions. However, it is mostly focusing on designing and development of conventional configurations. Whereas rotary wing configurations have clear advantages over fixed wing vehicles for missions and goals where the vehicle is required to maneuver in a stationary state (hover).

Like, monitoring and intelligence gathering within or around the buildings requires hovering vehicles with better stability characteristics. Duct's development augments thrust by 30 to 35 % more than generated by without duct, open rotor with same diameter. The idea offers definite advantages to the micro class of air vehicles where addition of minute weight of vehicle plays dominant role in overall its performance especially when in hover condition. The duct around rotor has multi-functions such as supporting rotors, producing a portion of thrust and reduces noise etc. This design also enhances vehicles operational safety in restricted areas through protection of rotor from tip strikes.

In research of turbo machinery such as turbines, ducted fans, compressors, and propulsion pumps, there are many key areas that impact design and performance of these vehicles. One of the key concerns is that a tip clearance in rotor and casing is essential to prevent a physical contact between surfaces. However, due to existence of this clearance, a flow under the blade originates due to pressure difference across the blade tip section and the relative motion between the blade and the wall. This difference of pressure between the surfaces drives a flow through the tip gap region of turbo machines. Upon exit from the tip clearance, the flow meets with the flow from the blade passage and rolls up to generate the tip leakage vortex. This tip clearance flow is tremendously complicated as it forms the presence of a potential core, secondary flow, boundary layer on end walls, and blade's boundary layer. The relative motion between the two also creates viscous as well as inviscid interactions taking place close to blade tip [2].

In case of compressors, it has been confirmed that overall performance of system mainly depends upon the pressure ratio and efficiency. Furthermore, experiments revealed that the loss of efficiency is higher by increase in the tip clearance level in between compressor's rotor tip and its casing. On the back end, where pressure and density are highest, the blade height tends to be smallest for ensuring an approximately same range of average velocity's axial component for all stages. This means that tip clearance level regulated over blade span is largest for high-pressure stages. However, efficiency for these stages decreases considerably as result of increase in ratio between tip clearance and blade height. Moreover, it is found that differences in high-pressure across compressor's tip clearance region causes unsteady loading on blades which ends up in noise generation. Now for decreasing this noise, which is generated by an unsteady loading, designer requires full understanding of flows near and around tip [3].

Date Received: 12th April 2020.

¹ Department of Mechanical Engineering, Hanyang University, Seoul, Korea

Corresponding Author: iliyas.raza@imse.rwth-aachen.de

One of the addressing issues found in propulsors is cavitation. The phenomena are generated by the fast collapsing of bubbles with low-pressure in a liquid. Most cavitation is observed to be appearing in the region near tip. The difference of pressure across the tip clearance causes the generation of cavitation near the suction surface of the propulsors blades. Cavitation has numerous harmful effects on blades within the propulsors which also become reason for this unwanted noise. Therefore, it is essentially a requirement to get rid of this source of cavitation to enhance propulsors blades life and also add to the prevent the detection of marine vehicles such as submarines and watercraft [4].

Ducted fan has several similar flow considerations as already being observed in compressors, turbines and propulsors. Rise in thrust produced by ducted fan is due to several factors and aerodynamics characteristics, one of the major causes is small clearance between tip of rotor and shroud casing; this reduces losses on rotor tip and hence enhances the rotor thrust. Another reason is the pressure distribution at upstream and slipstream flows of the rotor is generated such that its net effect produces additional upward thrust. In the case of a given rotor, this additional force can be optimized by varying different parameters that may be shroud's shape and size, rotor location along vertical axis and finally the tip clearance [5].

Ducted fans are popular choices in V/STOL unmanned aerial vehicles for a higher thrust / power ratio [6]. In addition to other reason for duct deployment, main being additional thrust generation through duct-rotor combination than that by the open type rotor. Shroud and Duct rotor interaction plays an important role in generating axial thrust. Some key issues that needs to be addressed before designing and sizing of ducted fans are

- i. Tip clearance in rotor and shroud casing. Open rotor has more tip losses due to generation of tip vortices. In case of ducted fans tip losses are minimized due to presence of duct/shroud.
- ii. Pressure distribution over duct or shroud is such that it adds into thrust and lift values.
- iii. Shape and size of duct or shroud also affects the thrust augmentation.
- iv. It also requires to be determined between optimum way to control the direction of vehicle. Either tilting the rotor or thrust vectoring using vanes. Anyway, will result in much more complicated aerodynamics characteristic though both are significantly different configuration [7-10].

A better knowledge of the tip clearance flow through turbomachinery such as turbines, compressors, ducted fans and propulsors will provide a better understanding for designing and development of turbomachinery. Because this tip clearance flow has an extremely significant effect on the performance and efficiency of turbomachinery, it is beneficial to understand the flow phenomena that occur because of the presence of this tip clearance [11].

The eventual goal of this research is to investigate the effects of tip clearance on three-dimensional velocity flow fields as well as thrust produced by ducted fan for small UAV systems. In order to achieve these objectives, three ducted fans having different tip clearance ratio and with same rotor size were examined under three different yawed conditions of hot-wire probe. The tip clearance effects have a considerable influence on three-dimensional flow field and thrust generated by these ducted fans. There have been many numerical studies about the flow in tip clearance region of turbine and compressor, but there have been very few experimental studies about the tip clearance effects on ducted fan aerodynamics characteristics. This article documents the experimental study used to investigate the tip clearance effects and hopefully these results will lead better understanding for fundamentals of the flow through the tip clearance region of ducted fan.

II. EXPERIMENTAL SETUP

The experimental apparatus, as shown in Fig 1, was set up for investigation of tip clearance effects on aerodynamic characteristics of a ducted fan. Three ducted fans having different tip clearance gap of 1mm, 2mm, and 3mm respectively are examined with the same rotor size of 248mm dia. The detailed specifications of these ducted fans are shown in Table I. The rotor used in the tested fans has 3 blades which are consisted of tip radius of 124mm and hub radius of 29mm as show in Table I. Dimensions of ducts having different value of internal diameter of 250mm, 252mm and 254mm respectively are investigated in this study.



Fig 1: Ducted Fan Tested in AERO Lab

TABLE I
Specification of Tested Fans

Parameters	Fan (A)	Fan (B)	Fan(C)
No. of blades	3	3	3
Tip diameter (mm)	248	248	248
Hub diameter (mm)	58	58	58
Tip clearance (mm)	1	2	3
Duct diameter (mm)	250	252	254
Duct length (mm)	100	100	100

TABLE II
Specifications of the Measuring Devices

Unit	Specifications
Constant Temperature Anemometer (CTA)	Kanomax Model 1011, Multichannel anemometer, Range: 0 ~ 0.5 A Operating resistance :10 Ω Size of unit:1/6 width,7cm
Proximity sensor	Contrinex 420, Housing size:6.5 mm Response frequency:5kHz Sensing distance :1.5 mm

Constant temperature anemometer (CTA) made by Kanomax model 1011 is used for conducting this research as shown in Table II. Its current range is 0 ~ 0.5 A with operating resistance of 10 Ω maximum. For measuring rpm and location point, Contrinex 420 proximity sensor is used. This sensor has response frequency of 5 kHz with sensing distance of 1.5mm whereas the housing size required for this sensor is 6.5mm.

III. EXPERIMENTAL METHODS

Three-dimensional flow velocity flow fields are studied by using a single 45° inclined hotwire probe. Many researchers have used the single sensor hot wire system for investigation of three-dimensional velocity flow fields and Reynolds stress.

A. Configuration of a slanted hotwire probe.

Geometry of the slanted hotwire probe is shown in Fig 2. Hotwire sensor inclined angle is represented by the unit vector \vec{A} slanted at the probe angle θ_o to the X-axis. The probe coordinated X, Y and Z are fixed to the probe, and velocity is denoted by \vec{V} . The probe yaw angle θ_y changes its value by turning angle while pitch angle θ_p remains constant as the probe is rotated about its axis. The absolute flow angle α of the sensor is expressed in terms of the angles of θ_o , θ_y and θ_p as given in Eq 1.

$$\cos \alpha = \cos \theta_o \cdot \cos \theta_p \cdot \cos \theta_y + \sin \theta_o \cdot \sin \theta_p \quad (1)$$

B. Calibration of a slanted hotwire probe

In this study, velocity calibration of hotwire is done by adopting method of Grande and Kool [12] at sensor yaw angle θ_y of 90° in a wind tunnel with speed of 0 ~ 60 m/s. Turbulence level of open type wind tunnel is 0.13%. By using a non-dimensional form of Kings law, the relation between bridge voltage (E) and effective cooling velocity (V_e) is obtained as shown in Eq 2.

$$E^2 = A + B (V_e)^n \quad (2)$$

The values of three coefficients A, B and n are calculated from a velocity calibration data obtained using the hotwire sensor normal to the flow. Whereas the probe yaw angle calibration was done on a wide range of probe angles from -90~90 degrees at fixed values of velocity and angle between probe axis and velocity vector. The ratio of effective cooling velocity and V_e and actual velocity V is expressed in Eq 3 as

shown in Fig 2.

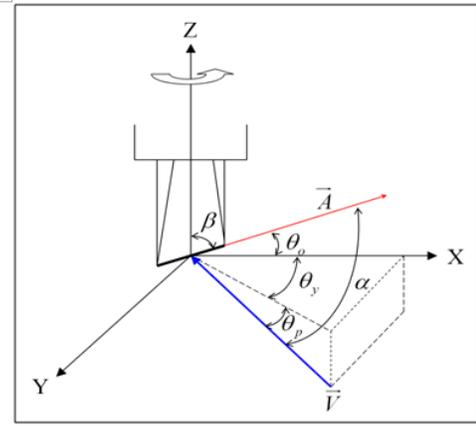


Fig 2: Geometry of a 45° Inclined Hotwire Probe

$$V_e / V = \cos \psi \quad (3)$$

$$\sin \psi = A_2 \cos \theta_p \cos \{\theta_y / A_1\} + A_2 \tan \theta_o \sin \theta_p \quad (4)$$

The experimental velocity and yaw angle calibration results are shown in Fig 3 & 4 respectively and these results are fitted by nonlinear curve fitting method. By the least square fitting of the effective cooling velocity data, the coefficient A, B & n from Eq 2 and A1 & A2 are determined from Eq 4.

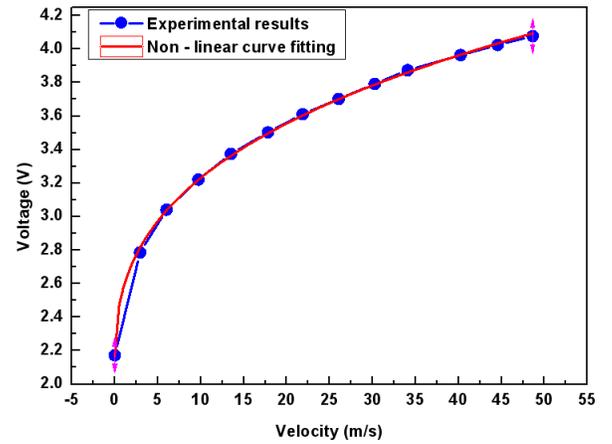


Fig 3: Velocity Calibration

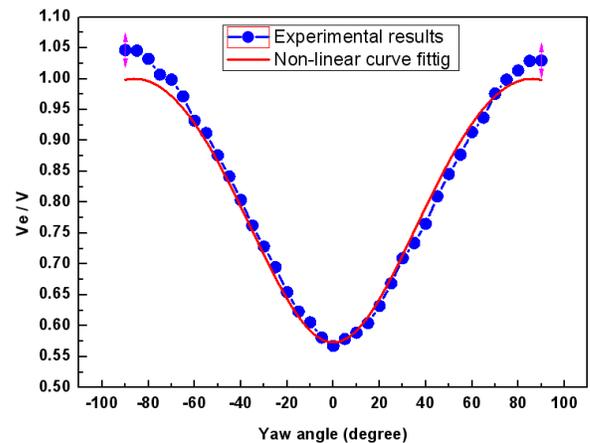


Fig 4: Yaw Angle Calibration

C. Measurement locations and technique

Three-dimensional velocity flow fields for ducted fan were measured at inlet and outlet side at 19 different positions. Fig 5 shows schematic diagram of measuring model with measurement locations. The stationary hotwire techniques were used to the single 45° inclined hotwire probe at three different yawed conditions 30°, 60°, and 90° with the increment of 30 degrees. Velocity flow field is measured at 19 points at inlet and outlet of three ducted fan.

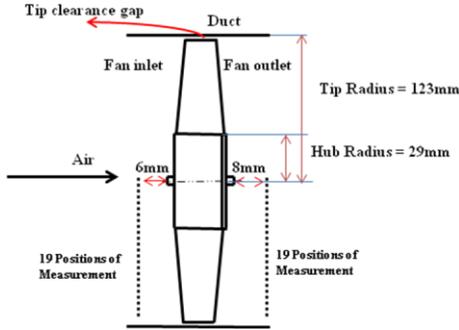


Fig 5: Measuring Points of Flow Fields

Hotwire measurements were made at ducted fans measurement points as shown in Fig 5 by positioning the hotwire sensor and recording data at each of three probe angle orientation. 19 radial locations at inlet and 19 different radial positions at outlet of ducted fans were selected for measuring velocity flow fields. The hotwire was rotated in the flow field to three different positions denoted by a, b and c as show in Fig 5 and 6. These probe positions relate to yaw angles of $\theta_{y,a}$, $\theta_{y,b}$ and $\theta_{y,c}$ which were set as indicated below by Eq 5, 6 and 7.

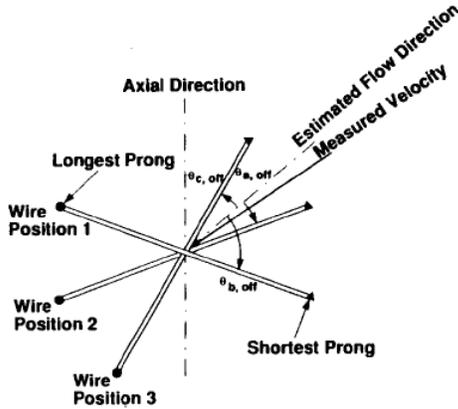


Fig 6: Measuring Locations of Hotwire

$$\theta_{y,a} = \theta_y \quad (5)$$

$$\theta_{y,b} = \theta_y - m_b \quad (6)$$

$$\theta_{y,c} = \theta_y - m_c \quad (7)$$

Where m_b and m_c are in probe turning angle increments from the location. In this study, one position was always close to + 90°. The other two positions were chosen with the increment of 30°. For each orientation of the wire, 800 data samples were taken with a certain A/D speed and

arithmetically averaged to obtain a time averaged effective cooling velocity from that particular probe position. For each average measurement of the velocity vector, a total of six nonlinear equations as given below were obtained for the orientation of the wire. The data were averaged by using PLEAT (Phase Lock Ensemble Averaging Techniques) and six nonlinear Eq 8 – 13 were solved simultaneously by using Newton – Raphson numerical methods.

$$V_{e1}^2 = V^2(1 - \sin^2 \psi_1) \quad (8)$$

$$V_{e2}^2 = V^2(1 - \sin^2 \psi_2) \quad (9)$$

$$V_{e3}^2 = V^2(1 - \sin^2 \psi_3) \quad (10)$$

$$\sin \psi_1 = A_2 \cos \theta_p \cos \left(\frac{\theta_y}{A_1} \right) + A_2 \tan \theta_0 \sin \theta_p \quad (11)$$


$$\sin \psi_2 = A_2 \cos \theta_p \cos \left(\frac{\theta_y + \theta_1}{A_1} \right) + A_2 \tan \theta_0 \sin \theta_p \quad (12)$$

$$\sin \psi_3 = A_2 \cos \theta_p \cos \left(\frac{\theta_y + \theta_2}{A_1} \right) + A_2 \tan \theta_0 \sin \theta_p \quad (13)$$


IV. RESULTS AND DISCUSSIONS

The three-dimensional velocity flow fields are measured at 19 points at inlet and outlet of ducted fan by using 45° inclined hotwire probe. The effects of the tip clearance on each type of ducted fan (types A, B, and C) performance have been studied experimentally for same rotor size, and fan speeds of 5000 RPM. Tip clearance was varied from 1mm to 3mm gap. Fig 7a and 7b show effects of tip clearance on velocity flow fields at inlet and outlet of ducted fan ‘A’ having smallest tip clearance gap as described in Table I. The contour plots are colored with the magnitude of velocity. As expected, the magnitude of velocity components i.e., axial, radial and tangential is high as compared to other two ducted fans ‘B’ and ‘C’ type. Moreover, scale of axial velocity component has higher value than radial and tangential component and decreased downstream of axial velocities near the outer wall. The effects of tip clearance are investigated on outlet as well as inlet of ducted fan. In case of outlet, tip clearance effects are more dominant as compared to inlet. Measurement results show that a complex interaction between the rotor tip and duct boundary layer appeared especially at outlet of the duct. Separation of flow is also observed at different points because of some non-uniformity of tip clearance gap due to manufacturing limitations.


Velocity contours plots in Fig 8a and 8b represents velocities at inlet and outlet of ducted fan B having medium tip clearance. Generated contours reveal that velocity magnitude decreased steadily as the tip clearance level enlarged from 1mm to 2mm. Also, behavior of rotor seems to be different by increasing tip clearance gap and the flow pattern near the tip region is also influenced when the tip clearance is increased.

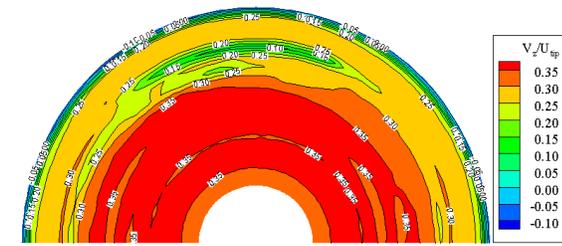


Axial Velocity

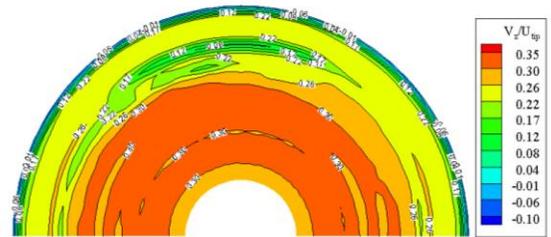


Axial Velocity

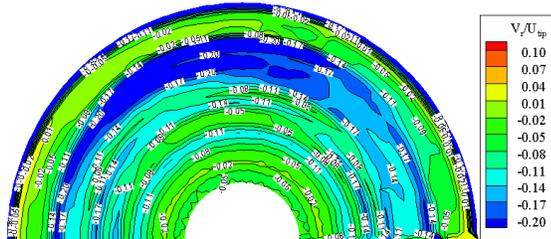


Radial Velocity

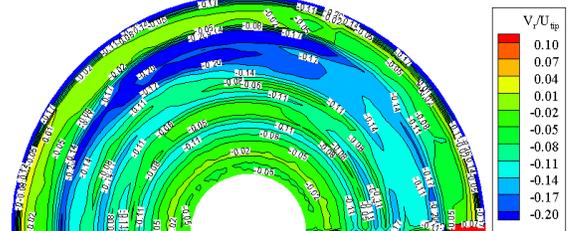

Radial Velocity

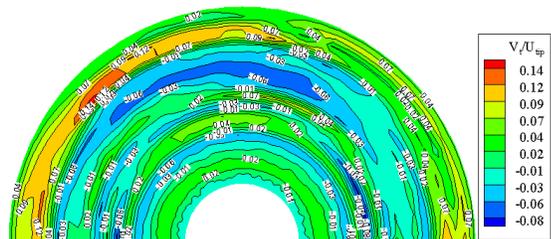


Tangential Velocity

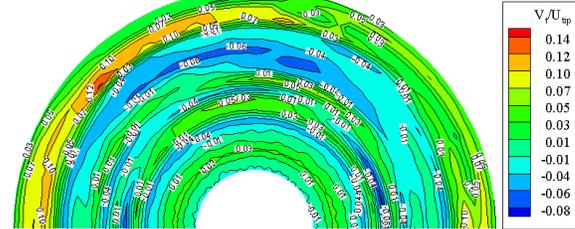


Tangential Velocity

Fig 7a: Non-dimensional Velocity Contours at Outlet of Fan 'A'


Fig 8a: Non-dimensional Velocity Contours at Outlet of Fan 'B'

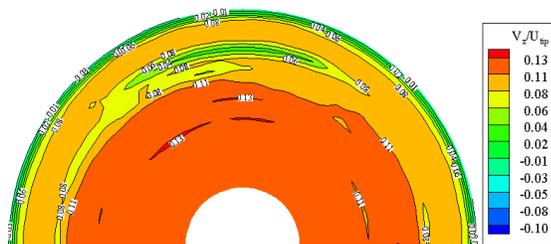


Axial Velocity

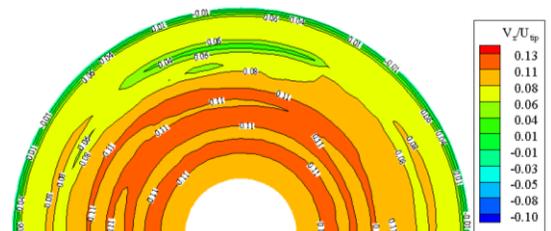


Axial Velocity

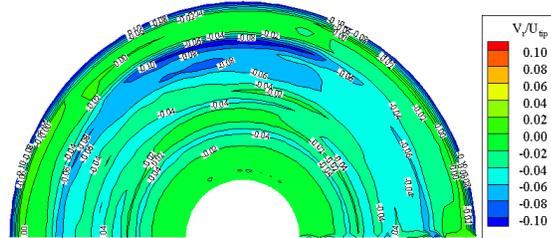


Radial Velocity

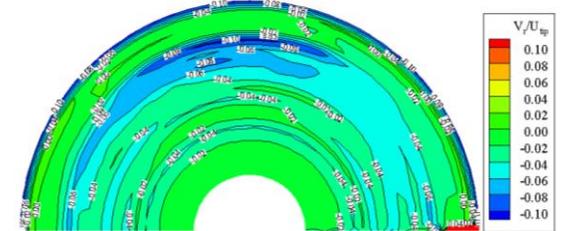

Radial Velocity

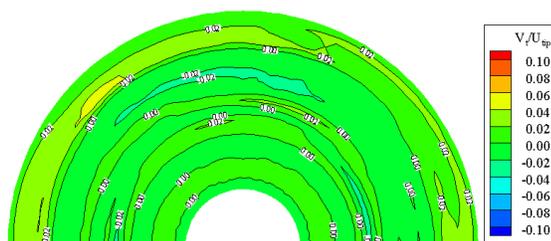

Tangential Velocity

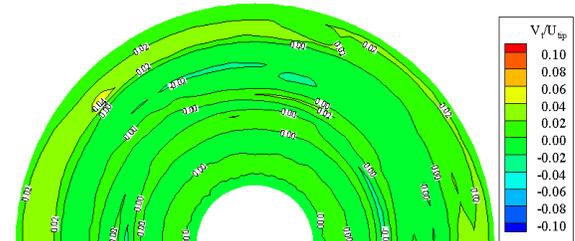

Tangential Velocity

Fig 7b: Non-dimensional Velocity Contours at Inlet of Fan 'A'

Fig 8b: Non-dimensional Velocity Contours at Inlet of Fan 'B'

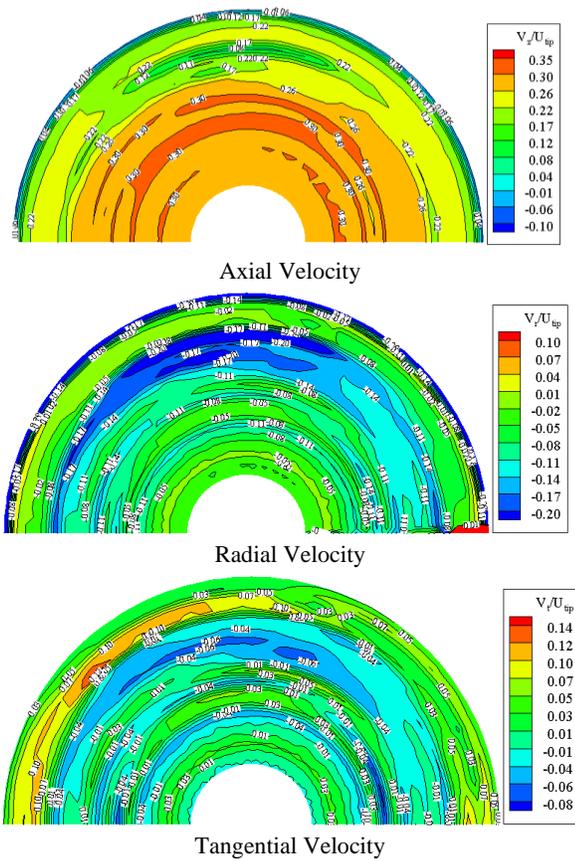


Fig 9a: Non-dimensional Velocity Contours at Outlet of Fan ‘C’

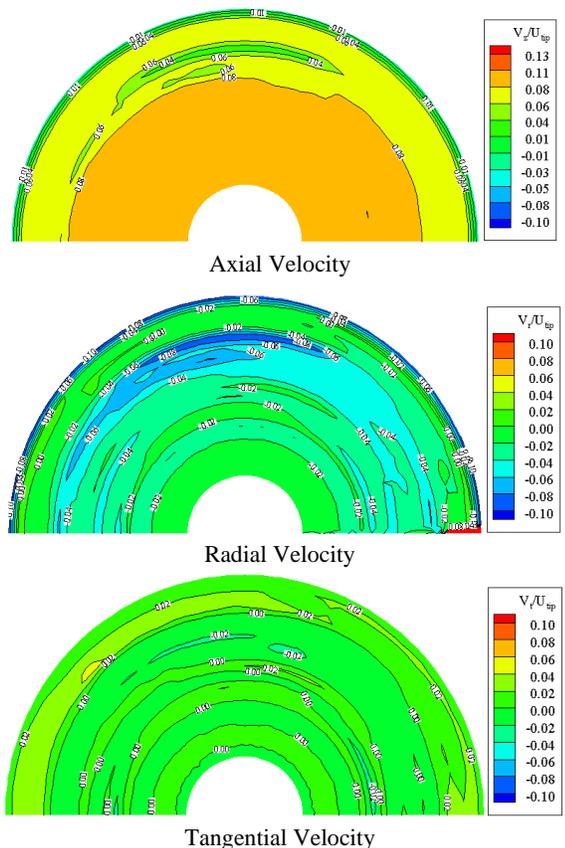


Fig 9b: Non-dimensional Velocity Contours at Inlet of Fan ‘C’

Reducing rotor blade height to increase tip clearance had

considerable effect on velocity flow field. When the clearance gap is increased from 1mm to 2 mm, the velocity magnitude of all three components seems to be decreased.

Plots of Fig 9a and 9b represent three components of velocity flow fields at inlet and outlet of ducted fan C having high value of tip clearance gap of 3mm. These results generally reveal that total velocity magnitude produced by the ducted fan decreases with the increase of tip clearance in the whole range of flow. The measurements were made at the same locations as made in the previous fan ‘A’ and fan ‘B’. The trend of inflow also plays an important role in magnitude and pattern of exit flow. An increase of the tip clearance level which results an increase of flow area has reduced velocity magnitude as shown in the results of fan ‘C’. On the comparison basis of all these results it can be concluded that decrease of tip clearance gap resulted in increasing of axial velocity magnitude more dominantly as compared to other two components of velocity like radial and tangential component.

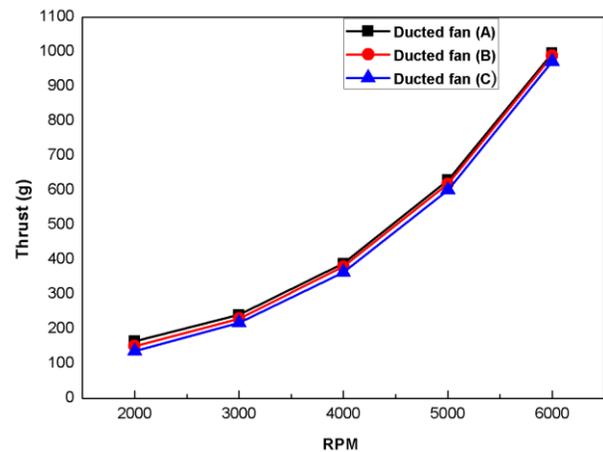


Fig 10: Thrust Variation with RPM and Tip Gap

Another key result of this study was measuring the sensitivity of variation of thrust to increase the tip gap as shown in Fig 10. Since a ducted fan that is usually used for thrusting a small UAV in flight includes a rotor having a plurality of circumferentially spaced apart blades and having a tip spaced radially inward from surrounding. Air that leaks through the blade tip clearance also decreases the efficiency of the fan and resulting thrust. Accordingly, the level of blade tip clearance is made as small as possible to minimize leakage flow without effecting undesirable tip rubs of the blades with the stator shrouds during operation. As expected, the higher value of tip clearance resulted in decrease of axial thrust. By enlarging the tip clearance, the tip leakage flow from higher pressure side to lower pressure side of the blade increase substantially in such fans, which brings considerable thrust losses.

V. CONCLUSIONS

The effects of tip clearance on a ducted fan performance are studied experimentally using three different sizes of ducts with same rotor size and following conclusions are drawn

i. A complex flow interaction between duct boundary layer and rotor tip appeared in all three values of tip clearance gap. In case of exit velocity, this effect is dominant as compared to inlet flow.

ii. Separation of exit flow at outlet of a ducted fan which has higher value of tip clearance gap is more as compared to low level of tip gap because of the pressure difference across the blade tip drives the flow through the tip clearance region.

iii. At a fixed speed of 5000 rpm, the magnitude of all three components of velocity flow fields particularly axial velocity contour have higher value at minimum tip clearance gap.

iv. Measurement results also showed that increasing the rotor tip gap decreased the duct thrust dramatically and therefore can decrease the total figure of merits of the ducted fan.

v. Since tip clearance gap has considerable impact on fan performance characteristics and must be taken into account in the rotor design considerations. However, magnitude and severity of the effects may be quite different, depending on rotor geometry and operating conditions of ducted fan. The efficiency of ducted fan will be continuously improved by reducing the tip clearance level; therefore, it is likely to be concluded that the tip clearance gap should be kept as low as possible.

ACKNOWLEDGMENTS

This research has been conducted as a part of contract project, supported by Second Brain Korea 21 Project.

VI. REFERENCES

1. Asim M and Khan A. A, “*Designing and Development of Unmanned Aerial Vehicle*”, 23rd Congress of International Council of the Aeronautical Sciences, pp. 134.1-134.9, 2002.
2. Bindon J P, “*The Measurement and Formation of Tip Clearance Loss*,” ASME Journal of Turbomachinery, Vol. 111, pp. 257-263, July 1989.
3. Foley A C and Ivey P C , “*Measurement of Tip Clearance Flow in a Multistage Axial Flow Compressor*” ASME Journal of Turbo machinery, Vol. 118, April 1996, pp. 211-217
4. Gearhart W S, “*Tip Clearance Cavitation in Shrouded Underwater Propulsors*” Journal of Aircraft, Vol. 03, No. 02, March-April 1996.
5. Robert Bulaga, “*Ducted Fan Efficiency and Noise*” SAE Technical Papers, 2005-02-3182, 2005.
6. Ali Akturk, Akamol Shavalikul and Cengiz Camci, “*PIV Measurements and Computational Study of a 5-Inch Ducted Fan for V/STOL UAV Applications*” AIAA 2009-332, 5-8 January 2009.
7. Hutton, S.P., 1958. Tip-clearance and other three-dimensional effects in axial flow fans. Zeitschrift für angewandte Mathematik und Physik ZAMP, 9(5-6), pp.357-371.
8. Michael R. Mendenhall and Selden B. Spangler “*Theoretical Study of Ducted Fan Performance*”, Nielsen Engineering and Research. NASA-CR 1494.
9. Anita I. Abrego, “*Performance Study of a Ducted Fan* CA
10. Mort, K.W., “*Performance Characteristics of a 4- Foot-Diameter Ducted Fan at Zero Angle of Attack for Several Fan Blade Angles*,” NASA TN D-3122, December 1965.
11. Black, D.M. and Wainauski, H.S., “*Shrouded Propellers—A Comprehensive Performance Study*”, AIAA 5th Annual Meeting and Technical Display, Philadelphia, PA, October 1968.
12. Grand, G. and Kool, P. “*An Improved experimental method to Determine the complete Reynolds Stress tensor with a Single Rotating Slanting Hot Wire*”, The institute of Physics, Vol. 14, (1981), pp. 196-201.